


USB 3FOOT SWITCH 2 INSTALLATION GUIDE

※付属しているCD内に入っているフォルダを、任意の場所にコピーしてからご使用ください。

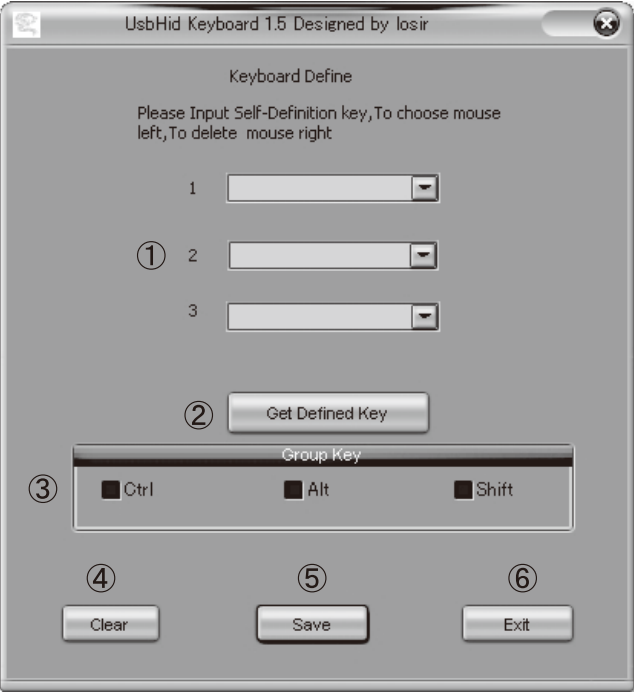

- ①各キー設定ウインドウ
- ②設定確認ボタン
- ③グループキーチェックボックス
- ④設定クリアボタン
- ⑤設定セーブボタン
- ⑥ソフト終了ボタン

Default時の設定

- 1: マウス 左クリック
- 2: マウス ダブルクリック
- 3: マウス 右クリック

【①キー設定ウインドウ】

ドロップダウンメニューより割り当てたいキー設定を選んでください。
割り当て可能なキー

Default	(デフォルト設定)
Mouse Left Click	(マウス 左クリック)
Mouse Right Click	(マウス 右クリック)
Mouse Double Click	(マウス ダブルクリック)
Close Window	(ウインドウを閉じる)
My Computer	(マイコンピュータを開く)
Log off	(ログオフ)

になります。

【ドロップダウンメニュー以外のキー割り当てに関して】
今現在割り当てられている設定部分を選んだ状態で、右クリックすることにより設定部分を空白に出来ます。
空白にした状態で、ご使用のキーボード上で設定したいキーを押しますと空白部分に、キー設定が現れます。

【②設定確認ボタン】

本体をUSBポートに挿している状態で、このボタンを押しますと、今現在設定されているキー設定が各キー設定ウインドウに表示されます。

【③グループキーチェックボックス】

各チェックボックスを押すことにより、キー設定する際の入力が簡単になります。
キーボードで『Ctrl』キーと『C』キーを押す操作が『Ctrl』のチェックボックスを押すことにより、『C』キーを押すだけで『Ctrl』キーと『C』キーを押した状態と同じになります。
またチェックボックスを二つ、三つ押すことにより『Ctrl』、『Alt』、『Shift』を同時に押した状態となります。

各キー設定の設定変更が成功したときに左記ウインドウが出ます。

今現在設定されているキー設定が、正常に認識された時、左記ウインドウが出ます。


【警告ウインドウ】

設定クリアされていない状態で、キー設定を変更しようとした場合、左記警告ウインドウが出ます。
設定変更する場合は、設定ウインドウを必ず空白(クリア)した状態でお願いします。

本体がUSBポートに挿さっていない状態で、設定変更をおこなったり、設定確認ボタンを押しますと左記警告ウインドウが出ます。

USB 3FOOT SWITCH 2 INSTALLATION GUIDE

※Please copy the folder inside this installation CD-ROM onto any location on your hard disk to start the operation.

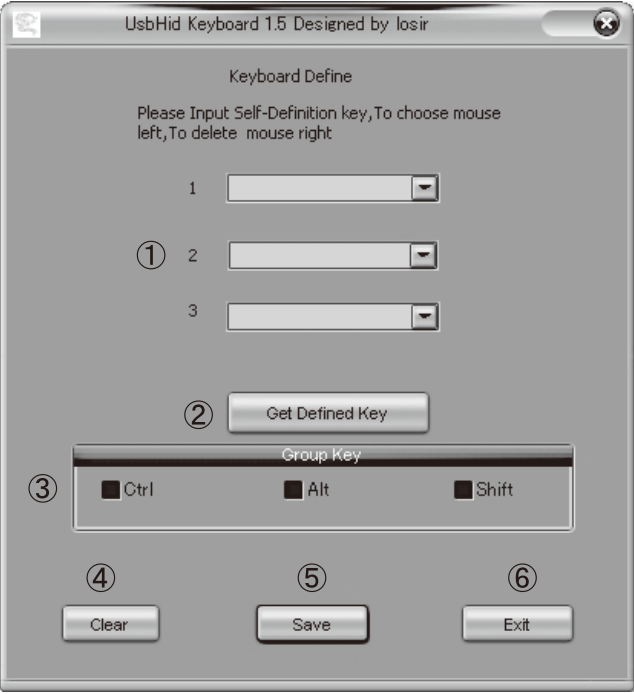

- ①Key Define Window
- ②Defined Key Confirmation Button
- ③Group Key Define Box
- ④Clear Button
- ⑤Save Button
- ⑥Exit Button

Default Defined Keys

- 1: Left Click on Mouse
- 2: Double Click on Mouse
- 3: Right Click on Mouse

【①Key Define Window】

Please choose the favorite key from the drop down menu.
Selection of Pre-Defined Keys

Default	(Default)
Mouse Left Click	(Left Click on Mouse)
Mouse Right Click	(Right Click on Mouse)
Mouse Double Click	(Double Click on Mouse)
Close Window	(Close Window)
My Computer	(My Computer)
Log off	(Log Off)

【How to Define your Favorite Key】
By pointing the mouse cursor and right click on the defined key, the box appears as blank. Now you can choose your favorite key by hitting the key as you wish to define on your keyboard.

【②Defined Key Confirmation Button】

By pressing this button while the device is connected to USB port, the defined key will show up on the window.

【③Group Key Define Box】

By selecting each group key define box, simplified key function can take into effect. By ticking "Ctrl" box, it works as the same as pressing "Ctrl" and "C" on your keyboard. By selecting multiple define-boxes (such as "Alt" and "Shift" shown on the window), it works as you are pressing "Alt" and/or "Shift" simultaneously.)

When key assignment is successful, this screen shows up

When defined key is recognized, this screen shows up

【Warning Window】

When key assignment is not cleared but try to define another key, this screen shows up. If you wish to define a new key, please clear the key define box (make it blank)

Defining the key or pressing the defined key display while the device is not connected to USB port, this screen shows up